

**DRS 6.000**  
ELECTRICAL SYSTEM AND INSTRUMENTS

9. Remove the two screws and washers retaining the dip, indicator and headlamp flasher switch clamp to the mounting plate, and remove the switch complete with clamp.
10. Remove the screw retaining the mounting plate and remove.

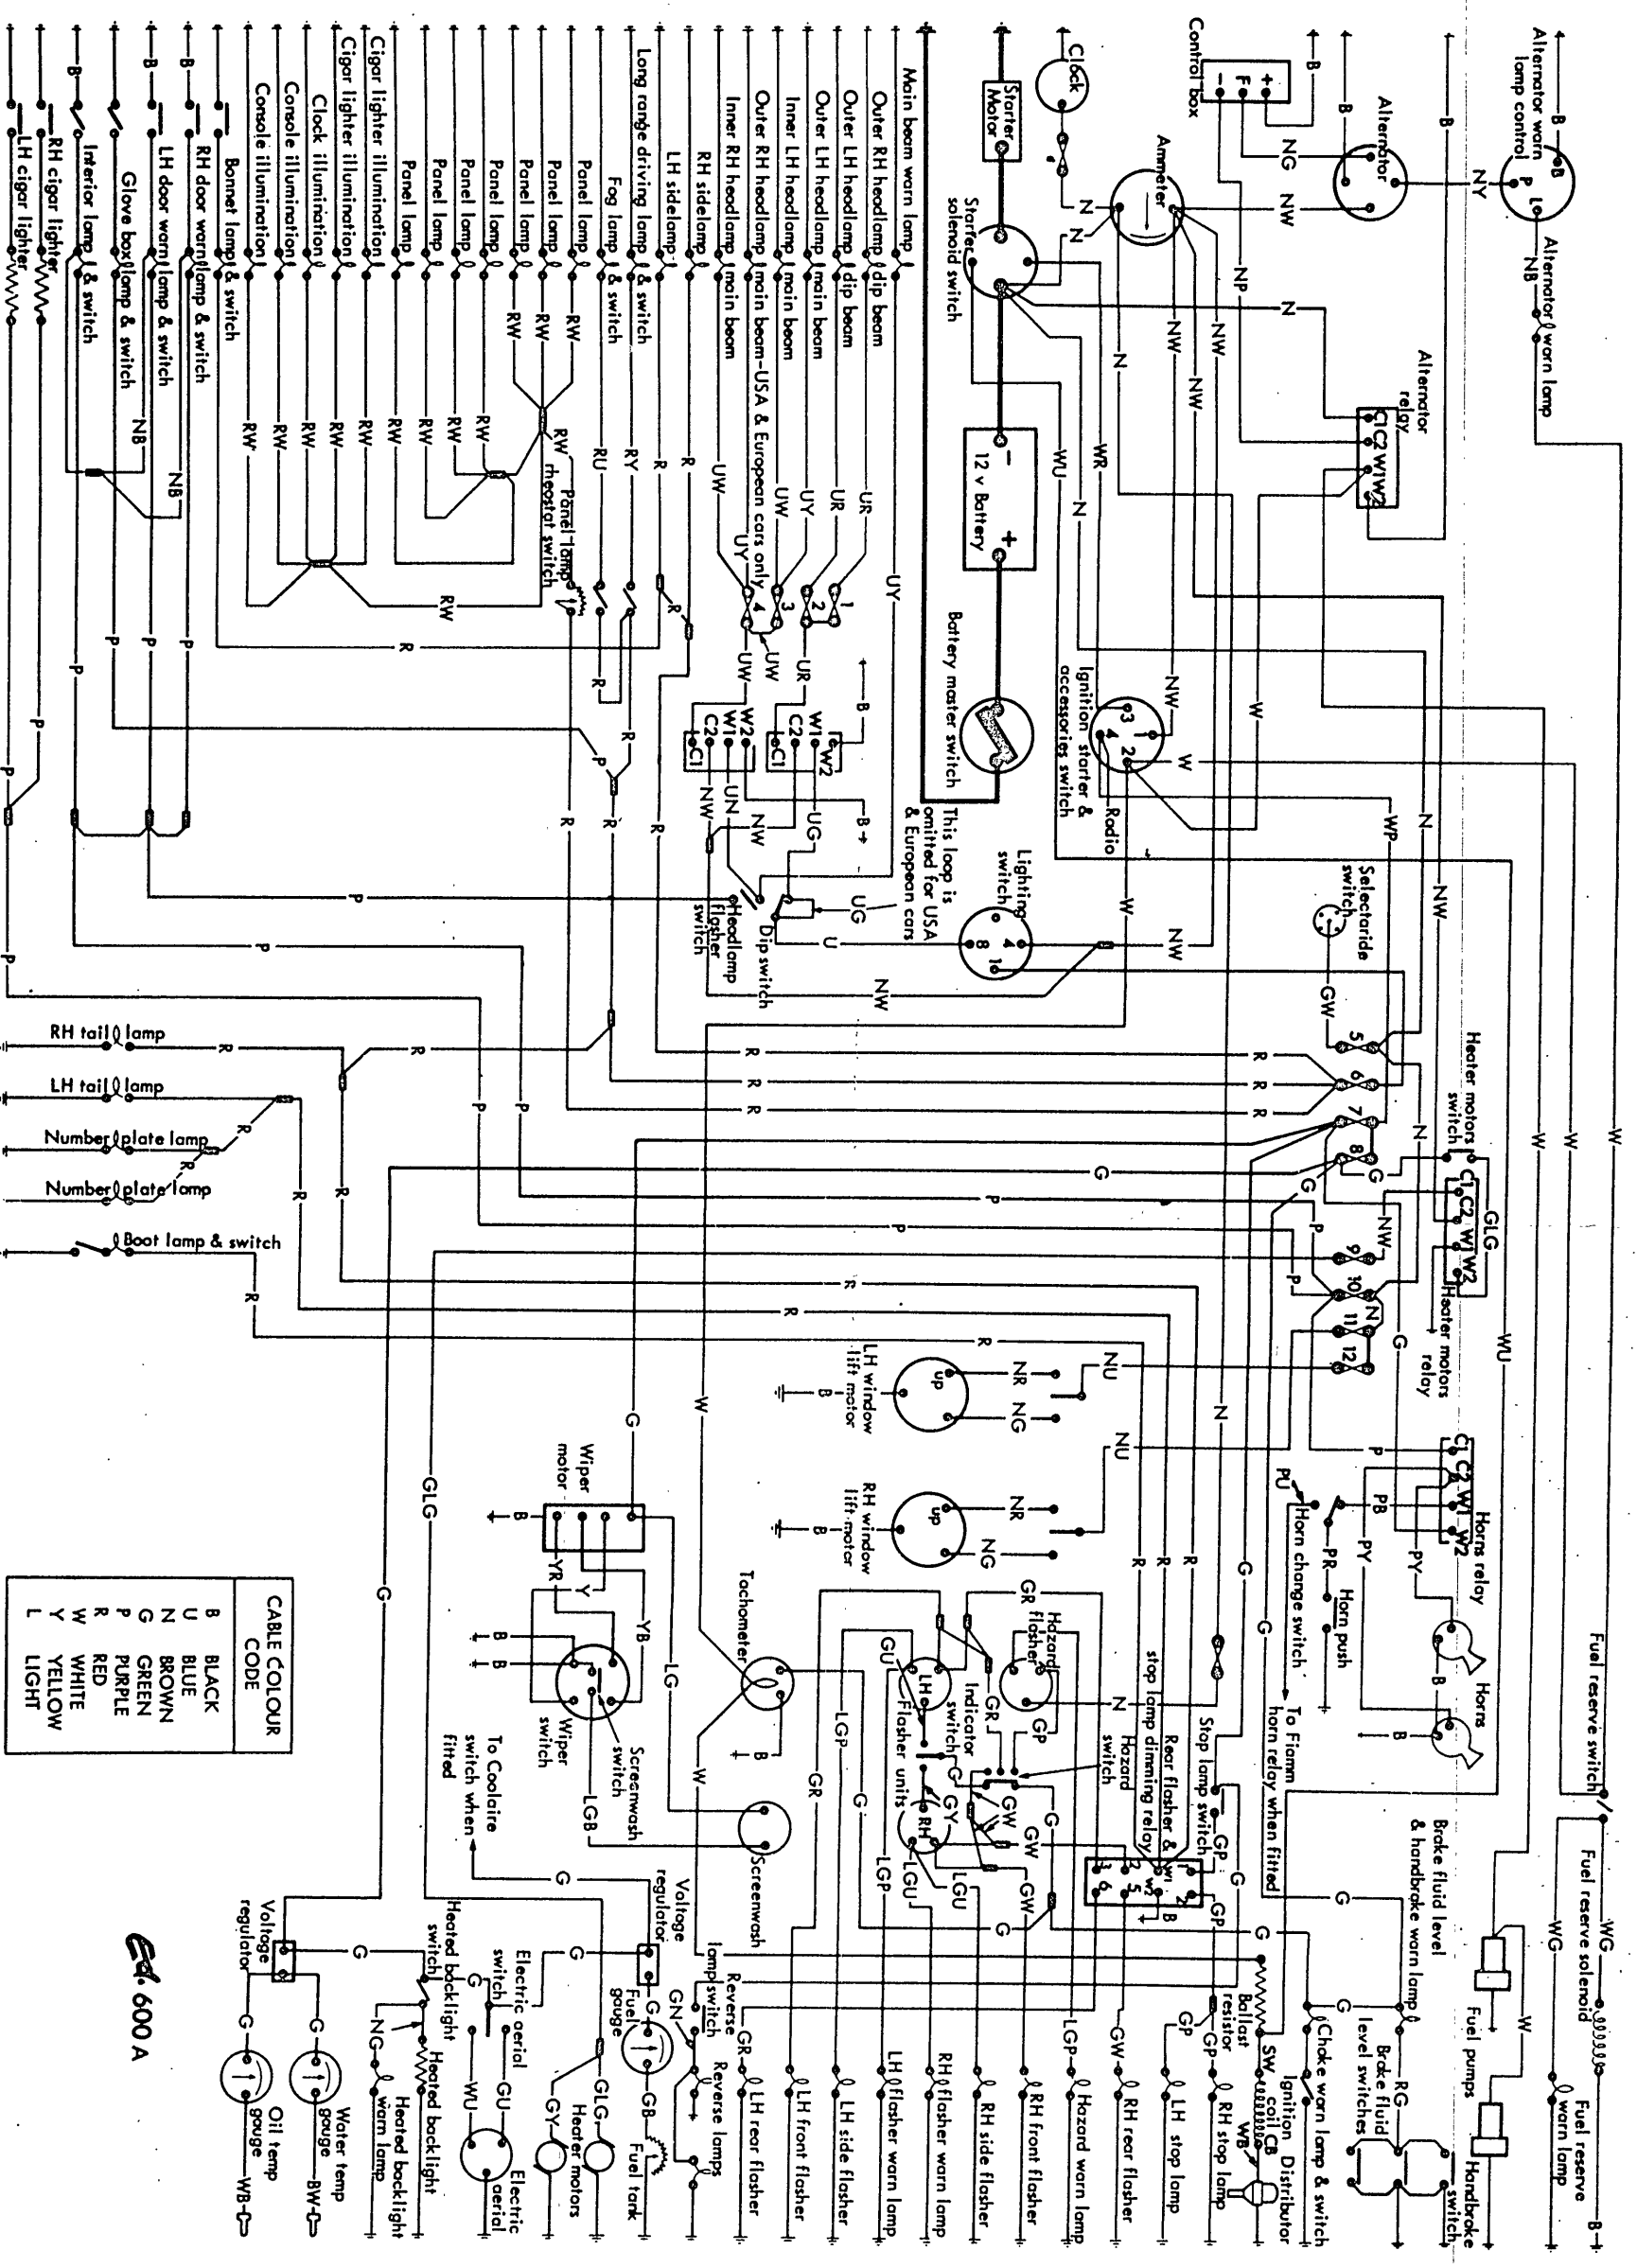


FIG. L20. Wiring diagram